

AERODROME CHART

TWR 130.0(118.2)

ZUXC XICHANG/Qingshan

N27°59.4'E102°11.0' ELEV 1558m

RWY	Direction	Bearing strength(PCN)
18	180°	RWY.TWY.APRON:56/R/B/W/T
36	360°	

BEARINGS ARE MAGNETIC
ALTITUDES, DISTANCES,
ELEVATIONS AND HEIGHTS
IN METERS



ILS/LLZ
109.3 1G0

SWY CONC 50X50
ELEV 1558

CWY 250X150



3600X50 CONCRETE
Strip 3720X300

TML

APRON

ILS/GP
332.0

ELEV 1545
SWY CONC 50X50

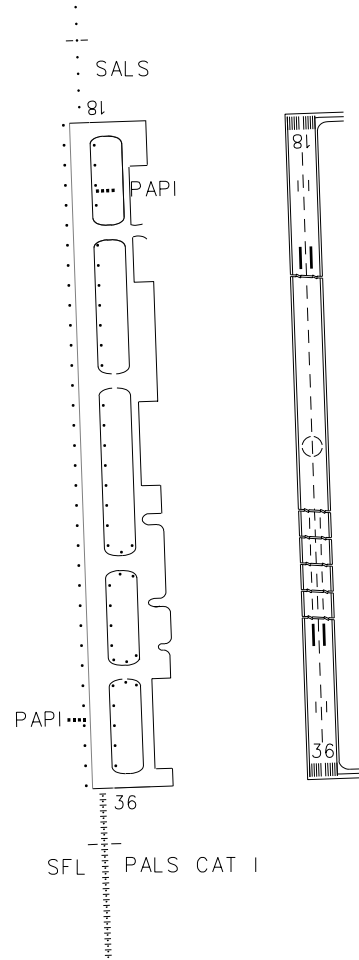

TAKE-OFF MINIMA(WITH RELIABLE ALTN)(m)				LIGHTS	
RWY	ACFT Type	REDL	NIL(Day only)	RWY18	RWY36
18/ 36	2 TURB ENG or 3&4 ENG	VIS800	VIS1600	SALS PAPI REDL	PALS CAT I PAPI REDL SFL
	Other	VIS1600			
<p>Note: TAKE-OFF MINMA of RWY36 is CLG 540m, VIS 5km if climb gradient is less than 5.9%.</p>					
<p>Changes: ARP coordInate; TWY A1, A2, G.</p>					